

Cim 301/12CR

FULL BORE BALL VALVE - "CR" BRASS - T12 SERIES - ALUMINIUM BUTTERFLY HANDLE



This article was made in compliance with the quality management requirements of ISO 9001 standard.

All articles are tested according to the EN 12266-1 standard.

It can be used in a wide variety of sectors: heating, air conditioning, water, sanitary systems, pneumatic systems, oil pipelines, gasoline networks, saturated steam and generally with any non corrosive liquid.


It is guaranteed for 5 years.

It is made of a "CR" - "DZR" brass alloy that complies with standard EN 12165-CW625N-DW.

Nominal Pressure: PN 32 (DN10-32) - PN 25 (DN40-50)

Operating temperature: -20 to 150°C


FLOW AND PRESSURE DROP

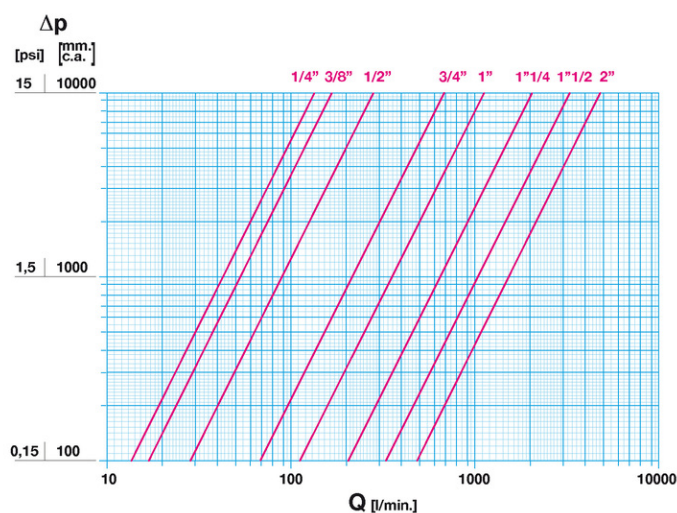

Notes:

1 l/min = 0,06 m3/h
1 m3/h = 16,67 l/min
1 bar = 10.000 mm w.c.
1 psi = 690 mm w.c.


PRESSURE TEMPERATURE RATINGS

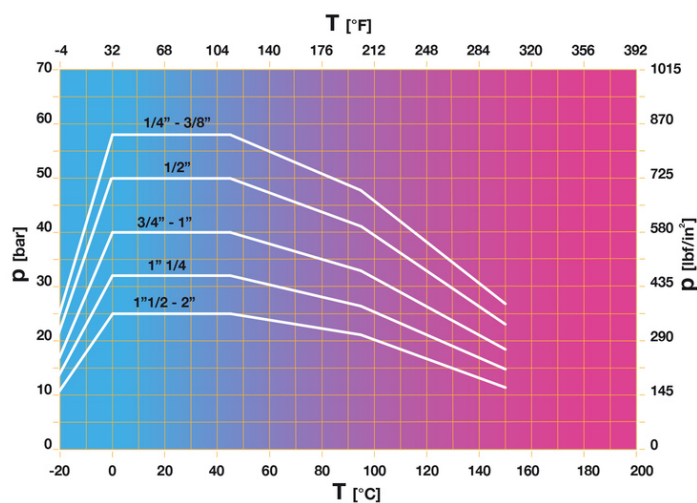

Notes:

1 bar = 14,5 psi
1 bar = 14,5 lbf/in2
°C = 5/9 x (°F-32)
°F = 32 + (9/5 x °C)

TECHNICAL DRAWING

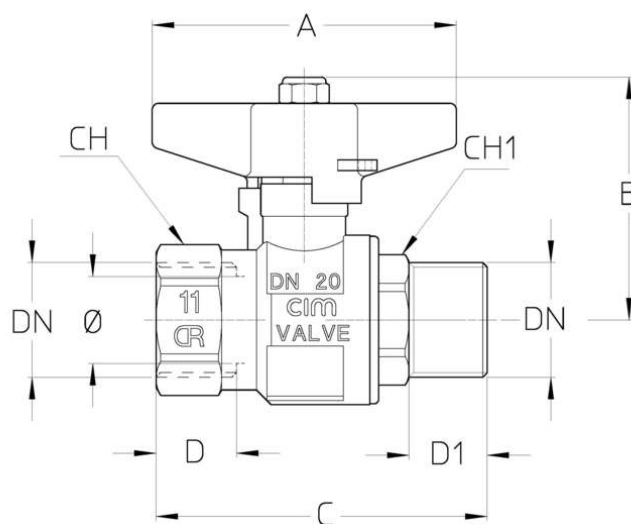

DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Ø mm	10	10	15	20	25	32	40	50
Grms.	120	125	230	380	610	950	1330	2120
A	43	43	50	70	70	85	100	100
B	36	36	52	56	60	73	88	95,5
C	53,5	51,5	69	76	90	103	117	136
D	11,5	12,5	17	18,5	21	22,5	23	26,5
D1	12,5	12	17	18	21	25	26	27,5
CH	18	18	25	31	40	49	55	69
CH1	20	20	24	27	36	47	49,5	65

1/4" and 3/8" Handle made of Nylon 6

Female thread:

ISO 7 - Rp

Male thread:

ISO 228

Upon request:

ISO 7 - Rc

ANSI B1.20.1 - NPT

TECHNICAL CHARACTERISTICS

KV CM CS MT								
DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Ø mm	10	10	15	20	25	32	40	50
KV	8	10	17	41	68	123	198	290
CM	1	1	3	5	6	7	10	13
CS	2	2	6	10	12	14	20	26
MT	10	10	10	24	24	45	90	90

KV = Capacity in m³/h at pressure drop of 1 bar.

CM = Operating torque in Nm.

CS = Starting torque in Nm.

MT = Stem breaking torque in Nm.

REACH Regulation

According to article 33 of REACH Regulation, we inform you that the components made of bronze and brass alloys that are parts of the articles we supply, contain the lead (as alloy component) in a higher quantity of the limit of 0,1% in weight. Lead has been inserted in the list of SVHC substances nominated for the authorisation process, in the updating published by the European Chemical Agency ECHA on 27th June 2018. Lead has been introduced with the following information:

- Substance: Lead

- CAS: 7439-92-1
- EC: 231-100-4
- List: SVHC
- Data of Inclusion: 27th June 2018

Since lead is an element of the alloy, no exposure is expected and consequently, no further information is requested for the safe use of this product.

The list is available at the following link: <https://echa.europa.eu/it/candidate-list-table> and since it is a continuously updated list, we declare the constant monitoring about insertion of new substances and the prompt on time information to our customers in case such substances should be contained in the products we supply.

Make sure product materials and features are suitable for system scope and conform to the local regulations in force

OUR CERTIFICATIONS

